



## 2015

### TECHNICAL REGULATIONS ROAD RACING

AARR 0	<b>GENERAL</b> .....	2
AARR 0.1	<b>Protective clothing and helmets</b> .....	2
AA RR 0.2	<b>Additional Equipment</b> .....	2
AA RR 0.3	<b>Number of tires per Event</b> .....	2
AARR 0.4	<b>Starting numbers</b> .....	2
AARR 1	<b>Class 125cc SPORT PRODUCTION</b> .....	3
AARR 2	<b>Class 125cc GRAND PRIX</b> .....	8
AARR 3	<b>Class Moto3</b> .....	10
AARR 4	<b>Class SUPERSPORT</b> .....	10
AARR 6	<b>Class SUPERSTOCK 600 and 1000</b> .....	10
AARR 7	<b>Class SUPERBIKE</b> .....	18
Appendix A	<b>Starting number</b> .....	19
Appendix B	<b>List of homologated CDI and wire harness models</b> .....	19
Appendix C	<b>Minimum weights</b> .....	20

Each modification is prohibited, if it is not allowed expressively

Everything printed in **bold** is new or changed for **2015**

**AA RR 0 GENERAL**

If during the practice sessions or the race itself a Technical Steward states a fault in a motorcycle that could represent a danger for the other riders, he must immediately inform the Clerk of the Course.

Random technical controls may be carried out during practices and the end of practices in the technical control area.

The rider is at all times responsible for his machine.

**AA RR 0.1 - PROTECTIVE CLOTHING AND HELMETS**

0.1.1 Riders and passengers must wear a complete leather suit with additional leather padding or other protection on the principal contact points, knees, elbows, shoulders, hips etc.

0.1.2 Linings or undergarments must not be made of a synthetic material which might melt and cause damage to the rider's skin.

0.1.3 Riders must also wear leather gloves and boots, which with the suit provides complete coverage from the neck down.

0.1.4 Leather substitute materials may be used, provided they have been checked by the Chief Technical Steward.

0.1.5 Use of a back protector is **mandatory**.

0.1.6 Riders must wear a helmet which is in good condition, provides a good fit and is properly fastened.

0.1.7 Helmets must be of the full face type and must conformed to one of the recognised international standards:

- Europe ECE 22-05, 'P'
- Japan JIS T 8133 : 2007
- USA SNELL M 2010

**for 2015 : Helmets with double D-Ring fasteners are highly recommended**

**for 2016 : Helmets with double D-Ring fasteners are mandatory**

0.1.8 Visors must be made of a shatterproof material.

0.1.9 Disposable "tear-offs" are permitted.

0.1.10 Any question concerning the suitability or condition of the riders clothing and/or helmet should be decided by the chief technical Steward, who can, if he wishes so, consult the manufacturers of the product before making a final decision

**AA RR 0.2 Additional Equipment**

Handlebar levers: Handlebar brake lever protection is highly recommended. Composite materials for handlebar protection are not permitted.

**A chain guard must be fitted in such a way to reduce the possibility that any part of the rider's body may become trapped between the lower chain run and the final drive sprocket at the rear wheel.**

Rear safety light: All motorcycles **must** be equipped with a functioning red light mounted at the rear of the seat, to be used during Wet Races or in low visibility conditions, as declared by the Race Direction.

**All lights must comply with the following:**

- a. **The output must be continuous - no flashing safety light whilst on track is allowed. The flashing is allowed in the pit lane when the pit limiter is active.**
- b. **The Safety light power supply may be separated from the motorcycle.**
- c. **The chief technical steward has the right to refuse any light system not satisfying this safety purpose.**

**AARR 0.3 TIRES**

If competitors use tires of Dunlop or Pirelli brand, these are distributed or approved exclusively by the official tyre suppliers during the event only: Dunlop tires only by Maco Racing, s.r.o. I.D. 35804241 and Pirelli tires only by IVRacing, s.r.o. I.D. 26921961. All tires to be used must be easily identifiable with a colour marking, to be applied by the official tyre suppliers in case of Dunlop or Pirelli. This rule is not valid for Vintage / Classic bikes. The special price for a set of tires from official supplier's **will be offered**.

**AARR 0.4 STARTING NUMBERS AND BACKGROUNDS**

The colours of the starting numbers and background are defined separately in the regulation of the class concerned. The number must be clearly visible and in a good shape.

The allocated number & plate for the rider must be affixed on the motorcycle as follows:

- one on the front, either in the centre of the fairing or slightly off to one side;
- one, on each side of the motorcycle, the location for the number is on the lower rear portion of the main fairing near the bottom; see appendix A
- In addition, a number can be placed at the top of the rear seat section with the top of the number towards the rider. These numbers must have the same size as the front numbers.

In case of a dispute concerning the legibility of numbers, the decision of the chief technical steward will be final.

The sizes for all the front numbers are:	Minimum height	140 mm
	Minimum width	80 mm
	Minimum stroke	25 mm
	Minimum space between numbers	10 mm
The sizes for all the side numbers are:	Minimum height	120 mm
	Minimum width	80 mm
	Minimum stroke	25 mm
	Minimum space between numbers	10 mm

## **AARR 1 - Class 125 SPORT PRODUCTION**

### **1.1 – Machine Specifications**

These rules are exclusively intended to limit changes to the homologated motorcycle in the interests of safety only.

### **EVERYTHING THAT IS NOT AUTHORISED AND PRESCRIBED IN THIS RULE IS STRICTLY FORBIDDEN**

The Motorcycle must be homologated by the original manufacturer only, except new bikes from the year 2015 on. For these motorcycles, a complete technical documentation, including tolerances, must be published by the manufacturer.

As the name Sport Production implies, the machines used are allowed limited modifications. Most modifications are allowed for safety reasons.

All motorcycles must comply in every respect with all the requirements for Road Racing as specified in FIM Road Racing Technical Rules.

All parts of a motorcycle must consist of that year of production as the motorcycle is homologated.

The appearance from both front, rear and the profile of motorcycles must (except when otherwise stated) conform to the homologated shape (as originally produced by the manufacturer).

Cubatures over 80cc up to 125 cc max. and 1 cylinder and max. 6 gears (7 gears in case of Cagiva Mito, subject to year of construction), are permitted.

### **1.2 Weight**

The minimum weight of the motorcycle is 110 kg without oil and fuel.

In the final inspection at the end of the race, the checked machines will be weighed in the condition they were at the end of the race.

At any time of the event, the weight of the whole machine (including the tank) must not be less than the minimum weight.

### **1.3 Number Plate Colours**

The background colours and figures for 125 cc SP motorcycles are black background with white numbers, with the RAL colour table values being 9005 for black and 9010 for white.

### **1.4 Fuel**

All engines must function on normal unleaded fuel with a maximum lead content of 0.005 g/l (unleaded) and a maximum MON of 90. (See also Art. 2.10 of the FIM Technical rules)

### **1.5 Machine Specifications**

All items not mentioned in the following articles must remain as originally produced by the manufacturer for the homologated machine.

#### **1.5.1 Frame Body and Rear Sub Frame**

Frames must remain as originally produced by the manufacturer for the homologated machine. The sides of the frame-body may be covered by a protective part made of plastic or composite material. These protectors must fit the form of the frame.

Nothing can be added by welding or removed by machining from the frame body. All motorcycles must display the manufacturers' vehicle identification number on the frame body (chassis number).

Engine mounting brackets or plates must remain as originally produced by the manufacturer for the homologated machine.



The rear sub frame must remain as originally produced by the manufacturer for the homologated machine. Protrusive, not-stressed brackets can be removed on request of the chief technical steward if he suppose they can be dangerous.

Additional seat brackets may be added but none may be removed. Bolt-on accessories to the rear sub-frame may be removed.

The paint scheme is not restricted but polishing the frame body or sub frame is not allowed.

It is allowed to remove the top engine mount connecting the cylinder to the frame of the motorcycle.

### **1.5.2 Front Forks**

The fork structure (spindle, stanchions, bridges, stem, etc.) must remain as originally produced by the manufacturer for the homologated machine.

Standard original internal parts of the forks may be modified.

After market damper kits/cartridges or valves may be installed but the external view of the fork must remain as homologated.

The fork caps can be modified or changed to add spring preload/compression adjusters.

Any quality and quantity of oil can be used in the front forks.

The height and position of the front fork in relation to the fork crowns is free.

The upper and lower fork clamps (triple clamp, fork bridges) must remain as originally produced by the manufacturer on the homologated machine.

A steering damper may be added or replaced with an after-market damper.

The steering damper cannot act as a steering lock limiting device.

### **1.5.3 Rear Fork (Swingarm)**

Each part of the rear fork must remain as originally produced by the manufacturer for the homologated machine (including rear fork pivot bolt and rear axle adjuster).

The swing arm can be modified to permanently fix the rear brake calliper support by welding, drilling or using Helicoil.

Rear wheel stand positioning (support) brackets may be added to the rear fork by welding or by bolts. Brackets must have rounded edges (with a large radius) viewed from all sides. Fastening screws must be recessed.

For safety reasons it is compulsory to use a chain guard made of plastic rigid material fitted in such a way as to prevent trapping between the lower chain run and the final drive sprocket at the rear wheel.

### **1.5.4 Rear Suspension Unit**

The rear suspension unit (shock absorber and its spring) may be modified or replaced, but the original attachments to the frame and rear fork (swing arm) must be used and the rear suspension linkage must remain as originally produced by the manufacturer of the homologated machine.

### **1.5.5 Wheels**

Wheels must remain as originally produced by the manufacturer at the time of sale into the dealer/distributor network for the homologated machine.

The speedometer drive may be removed and replaced with a spacer.

No modification of the wheel-axles or any fixing and mounting points for front and rear brake calliper are authorized. Spacers can be modified. Modifications of the wheels to keep spacers in place are permitted.

If the original design includes a cushion drive for the rear wheel, it must remain as originally produced for the homologated machine.

Wheel diameter and rim width must remain as originally homologated.

### **1.5.6 Brakes**

It is allowed to use the front **and rear** brake disc, including the follower from another manufacturer as **it** was on the homologated motorcycle. Brake disc and follower must be of the same material as the homologated one.

The outer and inner diameter of the disc must remain the same as the homologated one. The thickness of the brake disc may be increased by 20%, but the original brake calliper must be used without any modifications. The method of attachment of the followers to the wheel must remain the same as on the homologated motorcycle.

Front discs can be made floating, using original rotors and mounting points.

The front and rear brake calliper (mount, carrier, hanger) must remain as originally produced by the manufacturer for the homologated machine.

The rear brake calliper bracket may be mounted 'fixed' on the swing arm, but the bracket must maintain the same mounting (fixing) points for the calliper as used on the homologated machine. A modification of these parts is authorized. The swing arm may be modified for this reason to aid the location of the rear brake calliper bracket, by welding, drilling or by using a helicoil.

Front and rear master cylinder must remain as originally produced by the manufacturer for the homologated machine.

Front and rear brake fluid reservoir can be changed with an aftermarket product.

Front and rear hydraulic brake lines may be changed. The split of the front brake lines for both front brake calipers must be made above the lower fork bridge (lower triple clamp). "Quick" (or "dry-brake") connectors in the brake lines are authorized. Front and rear brake pads may be changed. Brake pad locking pins may be modified to quick-change type. Additional air scoops or ducts are not allowed.

### **1.5.7 Tires**

Tires must be fully moulded carrying all size and sidewall marking of the tires for sale to the public. Tires of V to Z rating must be used. The tires must have a DOT and/or E mark.

Wet weather tires may only be used after the race or practice is declared "wet" by the Clerk of Course.

Wet tyres do not need to carry DOT or E mark; however these tires must be marked "Not for Highway Use" or "NHS".

The use of tyre warmers is allowed.

### **1.5.8 Foot Rest/Foot Controls**

Foot rest/foot controls may be relocated but brackets must be mounted to the frame at the original mounting points.

The foot controls linkage may be modified. The original mounting points must remain. Their two original points of fixture (on foot controls and on the shift shaft) must remain as original.

Disburdening support staff of the foot rests is allowed.

Foot rests may be rigidly mounted or of a folding type which must incorporate a device to return them to the normal position.

The end of the foot rest must have at least an 8 mm solid spherical radius.

Non-folding metal footrests must have an end (plug), which is permanently fixed, made of plastic, Aluminium, Teflon or an equivalent type material (minimum radius 8mm).

The plug surface must be designed to reach the widest possible area of the end of the footrest. The Chief Technical Steward has the right to refuse any plug not satisfying this safety aim.

### **1.5.9 Handle Bars and Hand Controls**

Handle bars may be replaced (this does not include brake master cylinder).

Handle bars and hand controls may be relocated.

Throttle assembly and associated cables may be modified or replaced.

Clutch and brake lever may be exchanged by an after-market copy.

Switches can be changed but engine stop switch must be located on the handle bars.

### **1.5.10 Fairing/Body Work**

a) Fairing, front mudguards and body work may be replaced with the exact cosmetic duplicates of the original parts but must appear to be as originally produced by the manufacturer for the homologated machine, with the slight differences due the racing use (different pieces mix, attachment points, fairing bottom, etc).

The material may be changed. The use of carbon fibre, Kevlar or carbon composite materials is not allowed.

b) Overall size and dimensions must be the same as the original parts.

c) Windscreen may be replaced with a duplicate of transparent material. The height is as original with a tolerance of + 40 mm on the vertical distance from to the upper fork bridge.

d) Motorcycles that were not originally equipped with streamlining are not allowed to add streamlining in any form, with the exception of a lower fairing device, as described in (g and h). This device cannot exceed above a line drawn horizontally from axle to axle.

e) The original combination of instrument/fairing brackets may be replaced. All other fairing brackets may be altered or replaced.

f) The original air ducts running between the fairing and the air box must remain as homologated, as the front meshes. Carbon fibre and other exotic materials are forbidden. The wire mesh/plastic grills at the entrance of the air intake(s) in the front of the fairing can be taken away.

g) The lower fairing has to be constructed to hold, in case of an engine breakdown, at least half of the total oil and engine coolant capacity used in the engine (minimum 2 litres).

h) The lower fairing must incorporate an opening of Ø 25 mm diameter in the front lower area. These holes must remain closed in dry conditions and must only be opened in wet race conditions as declared by the Clerk of the Course.

i) Front mudguard may be replaced with a cosmetic duplicate of the original parts and may be spaced upward for increased tyre clearance.

j) Rear mudguard fixed on the swing arm that incorporate the chain guard can be modified to accommodate larger diameter rear sprockets.

k) All exposed edges must be rounded.

l) It is allowed to remove a side deflector from both front sides of the fairing.

### **1.5.11 Fuel Tank**

Fuel tank filler cap may be altered or replaced from those fitted to the homologated motorcycle, by a 'screw-on' type fuel cap. The fuel tank valve petcock must remain as originally produced by the manufacturer for the homologated machine.

The sides of the fuel tank may be covered by a protective part made of a composite material. These protectors must fit the shape of the fuel tank.

All fuel tanks must be completely filled with fire-retardant material (open-celled mesh, i.e. "Explosafe®").

#### **1.5.12 Seat**

The seat can be changed, but it's forbidden to use of carbon fibres and Kevlar if they are not present in the homologated motorcycle.

The top portion of the rear body work around the seat may be modified to a solo seat.

The appearance from both front rear and profile must conform to the any homologated shape.

The seat/rear cowl replacement must allow space for proper number display.

#### **1.5.13 Wiring Harness**

The original wire-loom may be modified as indicated hereafter: The unused wire loom elements supplying current to direction indicators, horn, ignition contact and key-lock, etc, may be unplugged and/or removed (no cutting is allowed, but to disconnect connectors is allowed).

#### **1.5.14 Electrical Equipment**

The disposition of the different components could be repositioned.

The electrical commands on the handle bars could be eliminated. The engine stop switch must be fixed.

The Electronic Control Unit (ECU) is free

The mechanisms that could allow interventions in order to change the declared curve (map) or ignition timing during the race are not allowed.

It's absolutely not allowed to change the ignition timing by piercing (enlarging) fixing holes of the pickup or by reducing the diameter of the fixing screws.

The loading circuit of the battery could be off during the race.

The removal of the starter box is allowed. In the electric device, it is allowed to remove the relative electrical wiring together with all those parts that enable the operation and activation, including flywheel gear

The motorcycle should be equipped – besides the disconnection switch – by a tug-device linked to the driver who – in the case of a slump (crash) – switches off the main electrical circuit, if there is an electrical pump for the carburettor fixed on the motor – as in the case of injection devices.

#### **1.5.15 Air Filter**

The air filter can be removed; the box of the filter can be removed or used, completely or partially maintaining the original attachments.

It's allowed to add to the filter box eventual linkages connecting the vents, carburettor and fuel tank.

It's allowed to change parts of the original filter box so that it can serve as air conveyer.

#### **1.5.16 Carburettor and Reed valves**

It's allowed to use the carburettor homologated for a new model of bike in all older models of the same make.

The maximum diameter of the carburettor must be 28 mm

Carburettor jets, slide spring and needles may be replaced.

The slide metering holes may not be changed.

Electronic or mechanical cold start devices must remain installed but may be deactivated.

The bell mouth (trumpet) of the carburettor can be modified, removed or replaced.

The number and thickness of the reed valve plates is free. The stoppers can be modified, removed or replaced.

It is allowed to use any complete suction valves (reed valve case, plates, stops) with any body filler flap. It is allowed to modify the original intake manifold (works between carburettor and reed valve case).

#### **1.5.17 Lubrication and cooling system**

The system of lubrication is free. It's allowed to remove the oil - gasoline mixer and all its parts.

The radiator cap is free; you can remove the expansion tank with on tubing.

Protection network and an air conveyor attached to the radiator to improve cooling could be installed

The air conveyor set below the bottom plate fork may be modified or replaced.

Removing the thermostatic valve is allowed

The installation of a water thermometer is allowed

#### **1.5.18 Cylinder and Cylinder head, piston**

No modifications except written below are allowed.

The cylinders cannot be replaced and must remain original.

The cylinders can be rebuilt only on constructor's limits.

The number of the cylinder ports must remain as original.

The size, shape of the Exh. port, scavenging and inlet ports are free.



The exhaust port polishing is allowed to reduce the gas residue deposits.

The flattening of the cylinder is permitted provided that the limit of the compression ratio remains unchanged; it's allowed to install the antiknock ring of any material on the same cylinder.

Cylinder - crankcase joint faces may be machined to make the flow linkage from crankcase to cylinder, but the crankcase has to remain in original version without any modification.

**Cylinder head:** Compression ratio must not exceed the value of 13, 5:1. The measuring of the volume of combustion chamber is carried out by a cylinder in the vertical position (without a spark plug) and piston in the top dead center. The oil will be poured through the spark plug hole into the combustion chamber oil with viscosity class SAE 10W, until it reaches its last thread and this volume must be at least 12.3 cm<sup>3</sup>. It is allowed to use any cylinder head insert with any shape of the combustion chamber.

The piston may be the original one or one of the **kit or any available aftermarket, but it must be the same dimension as the homologated one to retain the original bore and stroke indicated on the homologation list.**

#### **1.5.19 Crankshaft / Crankcase and all other Engine Cases (i.e. ignition case, clutch case.)**

The crankshaft flywheel must be the same as the **original one.**

**The Connecting rod could be changed with any available aftermarket, but the length must be same as by the original one.**

The installation of aluminium or bronze bushings to restore the seats of the bearings of the crankshaft is allowed. These bushings must have a cylindrical shape and maximum diameter of 70mm.

The measures of the bearings must remain original.

Painting, polishing and lightening are not allowed.

#### **1.5.20 Clutch, transmission**

No modifications are allowed.

Only friction and drive discs may be changed, but their number must remain as **in original version.**

Clutch springs may be changed.

It is not allowed to change the clutch system. A slipper clutch or back-torque clutch may be used only if it is standard equipment on the homologated model.

The final drive (drive and driven sprocket, chain) is free.

It is allowed to use any sprockets and chain for any end-chain transmission.

#### **1.5.21 Generator**

No modifications are allowed.

#### **1.5.22 Exhaust System**

The exhaust can be replaced

The noise limit for 125 cc Sport production machines will be 96dB/A by 7000 Rpm with a tolerance of + 3dB/A

The location of the silencer must remain as **in original version.**

Wrapping of the exhaust system is not allowed.

Titanium and carbon exhaust pipes and silencers are allowed.

For safety reasons the exposed edge(s) of the exhaust pipe(s) outlet must be rounded to avoid any sharp edges.

#### **1.5.23 Fasteners**

Standard fasteners may be replaced with the fasteners of any material and design, but the titanium fasteners may not be used. The strength and design must be equal to or exceed the strength of the standard fastener it is replacing.

Fasteners may be drilled only for mounting a safety wire, but intentional weight-saving modifications are not allowed.

Fairing/body-work fasteners may be changed to a quick disconnect type.

Aluminium fasteners may only be used in non-structural locations.

#### **1.5.24 The following items may be altered or replaced from those fitted to the homologated motorcycle.**

Any type of lubrication, brake or suspension fluid may be used.

Any type of spark plug **may be used.**

Any inner tube (if fitted) or inflation valves may be used.

Wheel balance weights may be discarded, changed or added to.

Gaskets and gasket materials (with the exception of cylinder gaskets)

Painted external surface finishes and decals.

#### **1.5.25 The Following Items MAY BE Removed**

Instrument and instrument bracket and associated cables.

Horn  
 Tool box  
 Tachometer  
 Speedometer  
 Light switch  
 Signal (Horn) switch  
 Turn signal switch  
 Radiator fan and wiring  
 Chain guard as long as it is not incorporated in the rear fender  
 Bolt on accessories on a rear sub frame

#### **1.5.26 The Following Items MUST BE Removed**

Headlamp, rear lamp and turn signal indicators (when not incorporated in the fairing).  
 Openings must be covered with suitable materials.  
 Rear-view mirrors.  
 License plate bracket.  
 Helmet hooks and luggage carrier hooks  
 Passenger foot rests.  
 Passenger grabs rails.  
 Safety bars, centre and side stands must be removed (fixed brackets must remain).

#### **1.5.27 The Following Items MUST BE Altered**

Motorcycles must be equipped with a functional ignition kill switch or button mounted at least on one side of the handlebar (within reach of the hand while on the hand grips) that is capable of stopping a running engine.  
 Throttle controls must be self closing when not held by the hand.

### **AARR 2 - Class 125 GRAND PRIX (125 GP)**

#### **2.1 125 GP Class specifications**

125 Over 80cc up to 125cc – Maximum one cylinder.

#### **2.2 Engines**

Engines may operate on the two -stroke principle only.  
 Engines must be normally aspirated.  
 Cubic capacity of the engine will be defined by the swept volume of the cylinder, i.e. the area of the bore of the cylinder multiplied by the stroke.

Cubic Capacity =	$D^2 \times 3,1416 \times S$
	4

D = Diameter

S = Stroke

No tolerance on capacities is permitted.

Engine capacity must be measured at ambient temperature.

#### **2.3 Gears**

There may be a maximum of six gears.

#### **2.4 Weight**

The minimum weight permitted:

The minimum weight in the 125GP class is: **Motorcycle 70 kg.**

#### **2.5 Fuel Tanks**

Fuel caps must be leak proof and have a positive closing device.

Fuel tank breather pipes must include a non-return valve. Fuel tank breather pipes must discharge into a suitable container, one per motorcycle with a minimum capacity of 200cc and a maximum capacity of 250cc.

Fuel tanks of all construction types must be filled with fire retardant material or be lined with a fuel cell bladder. Except for the case that a fuel tank is fixed on the chassis with bolts, all fuel lines from the fuel tank to the engine/carburettor system should have a self sealing breakaway valve. This valve must separate at less than 50% of the load required to break any part of the fuel line or fitting or to pull it out of the fuel tank.

#### **2.6 Safety and construction criteria**

##### **2.6.1 Throttle twist grips**

Throttle twist grips must close automatically when released.



### **2.6.2 Steering**

Handlebars must have a width of not less than 450mm and their ends must be solid or rubber covered. The width of the handlebar is defined as the width measured between the outside of the handlebar grips or throttle twist grips.

There must be at least 15 degrees of movement of the steering each side of the centre line.

Stops must be fitted to ensure a clearance of at least 30mm between the handlebar and the fuel tank frame and/or bodywork when at the extremes of steering lock.

Motorcycles must have a functioning stop engine button, easy to reach and control.

### **2.6.3 Brakes**

Motorcycles must have a minimum of one brake on each wheel that is independently operated.

Only brake discs of ferrous material are allowed.

### **2.6.4 Exhausts**

The outlet of the exhaust must not extend behind a line drawn vertically through the edge of the rear tyre. For safety reasons the exposed edge of the exhaust pipe must be rounded to avoid any sharp edges.

#### **2.6.4.1 Noise level**

The maximum noise levels at all times is 105 dB/A

Due to the similarity of the piston stroke in different engine configurations within the capacity classes, the noise test will be conducted at a fixed RPM, 7000 RPM

### **2.6.5 Footrests**

Footrests must have rounded ends with a minimum solid spherical radius of 8 mm.

### **2.6.6 Handlebar Levers**

Levers must not be longer than 200mm measured from the pivot point.

### **2.6.7 Bodywork**

The windscreen edge and the edges of all other exposed parts of the streamlining must be rounded.

The maximum width of bodywork must not exceed 600mm. The width of the seat or anything to its rear shall not be more than 450mm (exhaust pipes excepted).

Bodywork must not extend beyond a line drawn vertically at the leading edge of the front tyre and a line drawn vertically at the rearward edge of the rear tyre. The suspension should be fully extended when the measurement is taken.

When viewed from the side, it must be possible to see:

- A) At least 180 degrees of the rear wheel rim.
- B) The whole of the front rim, other than the part obscured by the mudguard, forks or removable air-intake.
- C) The rider, seated in a normal position with the exception of the forearms.

Note: No transparent material may be used to circumvent the above rules.

No part of the motorcycle may be behind a line drawn vertically at the edge of the rear tyre.

The seat unit shall have a maximum height of the (approximately) vertical section behind the rider's seating position of 150mm. The measurement will be taken at a 90° angle to the upper surface of the flat base at the rider's seating position, excluding any seat pad or covering.

Any on-board camera/antenna mounted on the seat unit is not included in this measurement.

Mudguards are not compulsory. When fitted, front mudguards must not extend:

- A) In front of a line drawn upwards and forwards at 45 degrees from a horizontal line through the front wheel spindle.
- B) Below a line drawn horizontally and to the rear of the front wheel spindle.

The mudguard mounts/brackets and fork-leg covers, close to the suspension leg and wheel spindle, and brake disc covers are not considered part of the mudguard.

Wings may be fitted provided they are an integral part of the fairing or seat and do not exceed the width of the fairing or seat or the height of the handlebars. Any sharp edges must be rounded.

Moving aerodynamic devices are prohibited.

### **2.6.8 Clearances**

The motorcycle, unloaded, must be capable of being leaned at an angle of 50 degrees from the vertical without touching the ground, other than with the tyre.

There must be a clearance of at least 15mm around the circumference of the tyre at all positions of the motorcycle suspension and all positions of the rear wheel adjustment.

### **2.6.9 Breather Pipes**

Any breather pipe from the engine or gearbox must discharge into a suitable container with a minimum capacity of 250cc. There must be a separate container for each breather pipe.

**2.6.10 Materials**

The use of titanium in the construction of the frame, the front forks, the handle-bars, the swinging arm spindles, and the wheel spindles is forbidden. For wheel spindles, the use of light alloys is also forbidden.

**2.6.11 Chain Guards**

A guard must be fitted in such a way as to prevent trapping between the lower drive chain run and the final drive sprocket at the rear wheel.

**2.6.12 Suspension and Dampers**

Electric/electronic controlled suspension, ride height and steering damper systems are not allowed. Adjustments to the suspension and steering damper systems may only be made by manual human inputs and mechanical/hydraulic adjusters.

**2.7. Rims**

Maximum rim widths are as follows:

	Front	Rear
125 GP	2,5" maximum	3,5" maximum

**2.8. Starting Number**

The background colours and figures for 125 cc SP motorcycles are black background with white numbers, with the RAL colour table values being 9005 for black and 9010 for white.

**2.9. Fuel, oil and coolants**

All motorcycles must be fuelled with unleaded petrol and must comply with the FIM Grand Prix specification. (FIM Art.01.63)

**AA RR 3 - Moto3**

Look at the code FIM Europe Road Racing (RR028/2014)

**AARR 4 - SUPERSPORT (SSp)**

Look at the code F.I.M. Road Racing World Championship Superbike & Supersport Regulations and its annexations except following:

**FIM 2.5.7 Tires**

see Art. AARR 0.3 and the number of tires are free

**FIM 2.5.7 Engines**

The total number of engines that can be used by each rider is free

**FIM 2.5.10 Main frame and pre assembled spare frame**

During the event, each rider can bring a **second complete** motorcycle to the technical Control.

**FIM 2.5.10.5 Wheels**

**Metal valve stems with metal stem caps are highly recommended.**

**FIM 2.5.10.6 Brakes**

**The front brake master cylinder can be changed or replaced.**

**AARR 5 – SUPERSTOCK 600 / 1000**

Motorcycles, which are not homologated by the FIM, are eligible if they are at least homologated by one of the Alpe Adria member FMN's.

Rules intended to limit changes to the homologated motorcycle in the interests of safety.

**EVERYTHING THAT IS NOT AUTHORISED AND PRESCRIBED IN THIS RULE IS STRICTLY FORBIDDEN**

As the name Stocksport implies limited modifications are allowed to the machines. Most modifications are only allowed for safety reasons.

Stocksport motorcycles require a FIM homologation (see Art.FIM 2.9). All motorcycles must comply in every respect with all the requirements for Road Racing as specified in these Regulations, unless it is equipped as such on the homologated machine.

The appearance from both front, rear and the profile of Superstock 600 / 1000 motorcycles must (except when otherwise stated) conform to the homologated shape (as originally produced by the manufacturer). The appearance of the exhaust system is excluded from this rule.

### **5.1 Discipline Specifications Superstock 600 / 1000**

#### **Superstock 600**

4 cylinders	over 401 cc up to 600 cc	4-stroke
3 cylinders	over 401 cc up to 675 cc	4-stroke
2 cylinders	over 401 cc up to 750 cc	4-stroke

#### **Superstock 1000**

3 and 4 cylinders	over 750 cc up to 1000 cc	4-stroke
2 cylinders	over 850 cc up to 1200 cc	4-stroke

The displacement capacities must remain at the homologated size. Modifying the bore and stroke to reach class limits is not allowed.

### **5.2 Minimum Weights**

The dry weight of a homologated motorcycle is defined as the total weight of the empty motorcycle as produced by the manufacturer (after removal of fuel, vehicle number plate, tools and main stand when fitted). To confirm the dry weight a minimum of three (3) motorcycles are weighed and compared. The result is rounded off to the nearest digit.

In the final inspection at the end of the race, the checked machines will be weighed in the condition they were at the end of the race.

At any time of the event, the weight of the whole machines (including the tank) must not be less than the minimum weight.

There is no tolerance on the minimum weight.

**Superstock 600 machines:** minimum weight = dry weight minus 12 kg

**Superstock 1000 machines:** minimum weight = dry weight minus 12 kg. In any case the minimum weight of SSStk 1000 motorcycles cannot be lower than 165 kg!

### **5.3 Starting Number**

**Superstock 600:** Red background with yellow numbers, with the RAL colour table values being 3020 for red and 1003 for yellow. (see appendix A)

**Superstock 1000.** Red background with white numbers, with the RAL colour table values being 3020 for red and 9010 for white. (see appendix A)

### **5.4 Fuel**

All engines must function on normal unleaded fuel with a maximum lead content of 0,005 g/l (unleaded) and a maximum MON of 90. (See also Art. 2.7 of FIM Technical rules)

### **5.5 Tires**

#### **Superstock 600:**

look point AARR 0.3 (page 2)

AA Road Racing Committee decided to accept the maximum tire size 190/55/17 for the whole season.

Tires must be a fully molded type carrying all size and sidewall marking of the tires for commercial sale to public. Tires with a maximum W rating must be used.

The depth of the tyre treads must be at least 2.5 mm. over the entire tire pattern width at a pre race control. The tires must have a positive and negative tread of 96 % and minimum 4 % negative (land and sea ratio) The maximum distance from the external edge of the tire to 50 % of the tread elements is 35 mm. Each size, front and rear, must be available with the same tread pattern as the commercial tires for road use.

The tires must have a DOT and/or E-Mark ,the DOT and/or E-mark must be on the tire sidewall.

Only when a race or practice has been declared "wet " the use of a special tyre commonly known as a full wet tyre is allowed.

Wet tires must be a fully moulded tyre, no hand cutting is allowed on the moulded tires.

The use of hand-cut tires is not allowed.

Wet tires do not need to carry a DOT and/or E-marks; however these tires must be marked "not for highway use " or " NHS " .

#### **Superstock 1000 :**

look point AARR 0.3 (page 2)



AA Road Racing Committee decided only for the AA Championship 2015  
Slick tires are allowed, wheel size 17'

## **5.6 Engine**

### **5.6.1 Fuel Injection System**

Fuel injection systems refer to throttle bodies, fuel injectors, variable length intake tract devices, fuel pump and fuel pressure regulator.

The original homologated fuel injector system must be used without any modification.

Bell mouths must remain as originally produced by the manufacturer for the homologated machine.

The fuel injectors must be stock and unaltered from the original specification and manufacture.

butterflies cannot be changed or modified.

Air and air/fuel mixture can go to the combustion chamber exclusively through the throttle body butterflies.

Electronically controlled throttle valves, known as "ride-by-wire", may be only used if the homologated model is equipped with the same system. Software may be modified but all the safety systems and procedures designed by the original manufacturer must be retained.

### **5.6.2 Cylinder Head**

No modifications are allowed.

No material may be added or removed from the cylinder head.

The cylinder head gasket can be changed.

The valves, valve seats, guides, springs, tappets, oil seals, shims, cotter valve, spring base and spring retainers must be as originally produced by the manufacturer for the homologated machine.

Additional valve spring shims are not allowed.

### **5.6.3 Camshaft**

No modifications are allowed.

At the technical checks for direct valve operation systems the cam lobe lifts is measured; for indirect valve operation systems (i.e. where cam followers are fitted), the valve lift is measured.

The timing of the camshaft is free; however no machining of the camshaft and camshaft sprocket is authorized.

### **5.6.4 Cam sprockets or Gears**

a. **Cam sprockets may be slotted to allow the adjustment of cam timing.**

b. **Pressed on cam sprockets may be replaced with an adjustable boss and cam sprocket.**

c. **The cam chain must remain as homologated.**

### **5.6.5 Cylinders**

No modifications are allowed.

### **5.6.6 Pistons**

No modifications are allowed (including polishing and lightening).

### **5.6.7 Piston Rings**

No modifications are allowed.

### **5.6.8 Piston Pins and Clips**

No modifications are allowed.

### **5.6.9 Connecting Rods**

No modifications are allowed (including polishing and lightening)

### **5.6.10 Crankshaft**

No modifications are allowed (including polishing and lightening)

### **5.6.11 Crankcase and all other Engine Cases (i.e. ignition case, clutch case.)**

Crankcases must remain as homologated. No modifications are allowed (including painting, polishing and lightening).

- a. **Lateral (side) covers may be altered, modified or replaced. If altered or modified, the cover must have at least the same resistance to impact as the original one. If replaced, the cover must be made from material of the same or higher specific weight and the total weight of the cover must not be less than the original one.**
- b. **All lateral covers/engine cases containing oil and which could be in contact with the ground during a crash, must be protected by a second cover made from metal, such as aluminium alloy, stainless steel, steel or titanium, composite covers are not permitted.**

- c. The secondary cover must cover a minimum of 1/3 of the original cover. It must have no sharp edges to damage the track surface.
- d. Plates or crash bars made from aluminium or steel are also permitted in addition to these covers. All of these devices must be designed to be resistant against sudden shocks, abrasions and crash damage.
- e. FIM approved covers will be permitted without regard of the material or its dimensions.
- f. These covers must be fixed properly and securely with a minimum of three (3) case cover screws that also mount the original covers/engine cases to the crankcases.
- g. The Chief technical steward has the right to refuse and forbid any cover not satisfying this safety purpose, if the evidence shows that the cover is not effective.

#### **5.6.12 Transmission/Gearbox**

No modifications are allowed

An external quick-shift system on the gear selector (including wire and potentiometer) **is allowed**.

Other modifications to the gearbox or selector mechanism are not allowed.

Countershaft sprocket, rear wheel sprocket, chain pitch and size can be changed.

The sprocket cover can be modified or eliminated.

Chain guard as long as it is not incorporated in the rear fender may be removed.

**Transmission gear shifter shaft supporting brackets can be added.**

#### **5.6.13 Clutch**

- a. Clutch system (wet or dry type) and the method of operation (by cable or hydraulic) must remain as homologated.
- b. Friction and drive discs may be changed.
- c. Clutch springs may be changed.

**Only for AA:** The clutch can be changed by an anti hopping clutch system

#### **5.6.14 Oil Pumps and Oil Lines**

No pump modifications are allowed

Oil lines may be modified or replaced. Oil lines containing positive pressure, if replaced, must be of metal reinforced construction with swaged or threaded connectors.

#### **5.6.15 Radiator and oil coolers**

The only liquid engine coolants permitted will be water or water mixed with ethyl alcohol.

Additional radiators and/or oil coolers are not allowed.

The radiator hoses to and from the engine can be changed, but the system must be maintained with the original tanks.

Radiator fan and wiring may be removed. Thermal switches, water temperature sensor and thermostat can be removed inside the cooling system.

Protective meshes may be added in front of the oil and/or water radiator(s).

Radiator cap is free.

#### **Only for SSt 1000:**

Tanks may be changed but must be fixed in a secure way. An additional water radiator may be fitted but the appearance of the front, the rear and the profile of the motorcycle must not be changed. Extra mounting brackets to accommodate the additional radiator are permitted.

#### **5.6.16 Air Box**

The air box must remain as originally produced by the manufacturer on the homologated machine, but the air box drains must be sealed. The air filter element may be modified or replaced.

All motorcycles must have a closed breather system. The oil breather line must be connected and discharge in the air box.

#### **5.6.17 Fuel Supply**

Fuel lines from the fuel tank to the delivery pipe assembly (excluded) may be replaced but the fuel petcock must remain as originally produced by the manufacturer.

Quick connectors or dry break quick connectors may be used.

Fuel vent lines may be replaced.

Fuel filters may be added.

Fuel pump and fuel pressure regulator must remain as homologated.

#### **5.6.18 Exhaust System**

Exhaust pipes, internal devices to lead the gas flow and silencers may be modified or changed. Catalytic converters can be removed.

The noise limit will be 102 dB/A with a tolerance of + 3dB/A after the race.

The **location of the silencer must remain as original.**

Wrapping of the exhaust system is not allowed except in the area of the rider's foot or an area in contact with the fairing for protection from heat.

**Titanium and carbon exhaust and silencers are allowed.**

For safety reasons the exposed edge(s) of the exhaust pipe(s) outlet must be rounded to avoid any sharp edges.

## **5.7 Electrics and Electronics**

### **5.7.1 Ignition / Engine control system (ECU) / Electronics**

- a. The engine control system (ECU) must be either:
  - i. The original system as homologated, with a change of software being allowed.
  - ii. The original system (with the production ECU) (option i) may have FIM/DWO approved external ignition and/or injection module/s added. The total combined retail price (software and tuning tools included) on sale to the general public cannot be higher than € 3.000,- (tax excluded). A special connector may be used to connect the module/s and the ECU.
  - iii. An FIM/DWO approved "Superstock Kit" model (produced and/or approved by the motorcycle manufacturer) may be used. A special connector/adaptor may be used to connect the ECU(s) and the original wiring harness. The combined retail price of the full system including software, tuning tool, download / connection cable any activations, upgrades and wiring harness(s) must be less than € 3.000,- (tax excluded).
- b. Central unit (ECU) may be relocated.
- c. Optional equipment sold by the motorcycle Manufacturer for the homologated model is considered not homologated with the bike and must follow the requirements for approved electronics/data loggers.
- d. During an event the chief technical steward has the right to ask the rider to substitute their ECU or external module with the sample received from the Manufacturer. The change has to be done before Sunday warm up.
- e. No extra sensors may be added for control strategies except shift rod sensor and wheel speed sensors. Wheel speed sensors must be included in the Kit ECU and Harness package if required.
- f. The addition of an infrared (IR) or GPS based lap timing system is allowed.
- g. Additional Data Logging is not allowed.
- h. Telemetry is not allowed.
- i. No remote or wireless connection to the bike for any data exchange or setting is allowed whilst the engine is running or the bike is moving.
- j. Harness:
  - a. The main wiring harness may be replaced by the kit wire harness as supplied for the Kit ECU model, produced and/or approved by the manufacturer of the motorcycle and by FIM/DWO
  - b. The key/ignition lock may be relocated, replaced or removed.
  - c. Cutting of the original main wiring harness is allowed.
- k. The original speedometer and tachometer may be altered or replaced (see also 2.6.11).
- l. Spark plugs may be replaced.
- m. The battery may be replaced. If replaced, its nominal capacity (C10) must be equal to or higher than the homologated type
- n. External modules may only control the fuelling and ignition timing, it may not be used for throttle blipping/actuation or any other function.

### **5.7.2 Generator Alternator and Electric Starter**

No modifications are allowed.

The electric starter must operate normally and always be able to start the engine during the event. The engine must start and turn on its own power when the electric starter has stopped its procedure.

## **5.8 Frame Body and Rear Sub Frame**

During the event, each rider can bring a **second complete** motorcycle to the technical Control.

The frame must remain as originally produced by the manufacturer for the homologated machine. The sides of the frame body may be covered by a protective part made of plastic or composite material. These protectors must fit the form of the frame.

Nothing may be added by welding or removed by grinding from the frame body.

All motorcycles must display a vehicle identification number punched on the frame body (chassis number).

Engine mounting brackets or plates must remain as originally produced by the manufacturer for the homologated machine.

Additional seat brackets may be added, but none may be removed.

Non-stressed protruding brackets may be removed if they do not affect the safety of the construction or assembly. Bolt-on accessories to the rear sub-frame may be removed.



Holes may be drilled in the frame and rear sub frame only for fixing of allowed components (i.e. fairing brackets, steering damper mount, etc.)

The paint scheme is not restricted but polishing the frame body or sub frame is not allowed.

Rear sub frame may be changed or altered, but the type of material must remain as the homologated or of higher specific weight. Repairing and welding of the sub frame is allowed.

### **5.8.1 Front Forks**

Forks structure, stanchions, stems, wheel spindle, upper and lower crown must remain as the original one produced by the manufacturer for the homologated motorcycle.

Fork caps may be modified or replaced to allow external adjustment (when permitted).

Dust seals may be modified, changed or removed if the fork remains totally oil-sealed.

**Mechanical Forks:** Original internal parts of the homologated forks may be modified or replaced. After market damper kits or valves may be installed.

**Electronic Suspensions:** No aftermarket or prototype electronically controlled suspension may be used, unless such suspension is already present on the production model of the homologated motorcycle, and it must remain completely standard (all mechanical or electronic parts must remain as homologated, with the exception of shims and springs). The electronic front suspension may be replaced with a mechanical system from a similar homologated model from the same manufacturer.

The original surface finish of the fork tubes (stanchions, fork pipes) may be changed. Additional surface treatments are allowed.

The upper and lower fork clamps (triple clamp, fork bridges and stem) must remain as originally produced by the manufacturer on the homologated machine.

A steering damper may be added or replaced with an after-market damper.

The steering damper cannot act as a steering lock limiting device.

Any quality and quantity of oil can be used in the front forks.

The protrusion (height and position of the front fork in relation to the fork crowns) is free.

**SStk 1000:** The original surface finish of the fork tubes (stanchions, fork pipes) may be changed. Additional surface treatments are allowed.

### **5.8.2 Rear Fork (Swing arm)**

Every part of the rear fork must remain as originally produced by the manufacturer for the homologated machine (including rear fork pivot bolt).

**Rear axle/chain adjuster can be changed to an aftermarket product.**

Rear wheel stand positioning (support) brackets may be added to the rear fork by welding or by bolts. Brackets must have rounded edges (with a large radius) viewed from all sides. Fastening screws must be recessed. An anchorage system or point(s) to keep the original rear brake calliper in place may be added to the rear swing arm.

### **5.8.3 Rear Suspension Unit**

Rear suspension unit (shock absorber and its spring) may be modified or replaced, but the original attachments to the frame and swing arm must be used and the rear suspension linkage must remain as originally produced by the manufacturer for the homologated machine.

**Mechanical Suspension:** Rear suspension unit may be changed.

**Electronic Suspension:** No aftermarket or prototype electronically-controlled suspension unit may be used, unless such suspension is already present on the production model of the homologated motorcycle and it must remain completely standard (any mechanical or electronic part must remain as homologated, with the exception of shims and spring). The electronic shock absorber can be replaced with a mechanical one.

All the rear suspension linkage parts must remain as originally produced by the manufacturer for the homologated motorcycle.

### **5.8.4 Wheels**

Wheels, bearings and internal spacers must remain as originally produced by the manufacturer.

If the original design includes a cushion drive for the rear wheel, it must remain as originally produced for the homologated machine.

No modification of the wheel-axles are authorized. Spacers can be modified. Modifications to keep spacers in place are permitted.

Fixing and mounting points for front brake calliper must remain as homologated.

Wheel balance weights may be discarded, changed or added to.

**Metal valve stems with metal stem caps are highly recommended.**

### **5.8.5 Brakes**

- a. **Brake discs may be replaced by aftermarket discs which comply with the following requirements:**

- i. **Brake discs and carrier must retain the same material as the homologated disc and carrier.**
- ii. **The outside and inner diameters of the brake disc must not be larger than the ones on the homologated disc.**
- iii. **The thickness of the brake disc may be increased but the disc must fit into the homologated brake calliper without any modification. The number of floaters is free.**
- iv. **The fixing of the carrier on the wheel must remain the same as on the homologated disc.**

**Front and rear brake calliper (mount, carrier, hanger) must remain as originally produced by the manufacturer for the homologated motorcycle.**

**In order to reduce the transfer of heat to the hydraulic fluid it is permitted to add metallic shims to the callipers, between the pads and the callipers, and/or to replace light alloy pistons with steel pistons made by the same manufacturer of the calliper**

**The Antilock Brake System (ABS) may be used only if installed in the homologated model for road use. However it must be completely standard (any mechanical or electronic part must remain as homologated).**

**The Antilock Brake System (ABS) may be disconnected and its ECU can be dismantled. The ABS rotor wheel can be removed, modified or replaced.**

**Front and rear master cylinder must remain as originally produced by the manufacturer for the homologated machine. Front and rear brake fluid reservoir may be changed with an aftermarket product. Front and rear hydraulic brake lines and fluid reservoir may be changed with aftermarket products.**

**The split of the front brake lines for both front brake callipers must be made above the lower fork bridge (lower triple clamp).**

**Front and rear brake pads may be changed. Brake pad locking pins may be modified.**

**Hand lever adjusters are permitted.**

**Additional air scoops or ducts are not allowed.**

#### **5.8.6 Foot Rest/Foot Controls**

Foot rest/foot controls may be relocated but brackets must be mounted to the frame at the original mounting points.

Foot controls linkage may be modified. The original mounting points must remain. Their original points of fixture (for the footrest, foot controls and on the shift shaft) must remain as original.

Foot rests may be rigidly mounted or could be of a folding type which must incorporate a device to return them to the normal position.

The end of the foot rest must have at least an 8 mm solid spherical radius.

Non-folding footrests must have an end (plug) which is permanently fixed, made of plastic, Teflon or an equivalent type material (Alloy) (minimum radius 8mm).

The plug surface must be designed to reach the widest possible area in order to decrease the risk of injuries to the rider in the case of an accident.

The Chief Technical Steward has the right to refuse any plug not satisfying this safety aim.

#### **5.8.7 Handle Bars and Hand Controls**

Handle bars may be replaced (does not include brake master cylinder).

Handle bars and hand controls may be relocated.

Throttle grip can be modified or substituted.

Throttle controls must be self-closing when not held by the hand.

Throttle assembly and associated cables can be modified or replaced but the connection to the throttle body and the throttle controls must remain as homologated. Switches can be changed but electric starter switch and engine stop switch must be located on the handle bars.

Clutch and brake lever may be exchanged by an after-market model. An adjuster to the brake lever is allowed.

Motorcycles must be equipped with a functional ignition kill switch or button mounted on the right hand handlebar (within reach of the hand while on the hand grips) that is capable of stopping a running engine. The button or switch must be RED.

An adjuster to the brake lever is allowed.

#### **5.8.8 Fuel Tank**

Fuel tank filler cap may be altered or replaced from those fitted to the homologated motorcycle, by a 'screw-on' type fuel cap.

Fuel tank valve petcock must remain as originally produced by the manufacturer for the homologated machine. The sides of the fuel tank may be covered by a protective part made of a composite material. These protectors must fit the shape of the fuel tank.

Fuel tanks with tank breather pipes must be fitted with non-return valves that discharge into a catch tank with a minimum volume of 250cc made of a suitable material.

All fuel tanks must be completely filled with the fire-retardant material (open-celled mesh, i.e. "Explosafe®").

**5.8.9 Seat**

Seat, seat base and associated bodywork may be replaced with parts of similar appearance as originally produced by the manufacturer for the homologated machine.

The original seat locking system (with plates, pins, rubber pads, etc.) can be removed.

The top portion of the rear body work around the seat may be modified to a solo seat.

The appearance from both front rear and profile must conform to the homologated shape.

The homologated seat locking system (with plates, pins, rubber pads, etc.) can be removed.

The seat/cowl replacement must allow for proper number display.

**5.8.10 Fairing/Body Work**

a) Fairing, front mudguards and body work may be replaced with cosmetic duplicates of the original parts, which must appear to be as originally produced by the manufacturer for the homologated machine, or with slight differences due to the racing use permitted (different pieces mix, attachment points, fairing bottom, etc). The material may be changed. The use of carbon fibre, or carbon composite materials is not allowed with the following exceptions: Local specific reinforcements made of kevlar or kevlar-carbon is authorized around the holes and other stressed points.

b) Overall size and dimensions must be the same as the original parts.

c) Wind screen may be replaced with an aftermarked product. The height of the windscreen is free, with a tolerance of + 40 mm (FIM +/- 15 mm) measured on the vertical distance from to the upper fork bridge.

d) Motorcycles that were not originally equipped with streamlining are not allowed to add streamlining in any form, with the exception of a lower fairing device, as described in (g and h). This device cannot exceed above a line drawn horizontally from axle to axle and must follow the specifications described at point g).

e) The original combination of instrument/fairing brackets may be replaced, **regardless of the material**. All other fairing brackets may be altered or replaced.

f) The original air ducts running between the fairing and the air box may be altered or replaced. Particle grills or "wire-meshes" originally installed in the openings for the air ducts may be taken away.

g) The lower fairing must be constructed to hold, in case of an engine breakdown minimum 6 litres. **The upper edge of all the openings in the fairing must be positioned at least 70 mm above the bottom of the fairing.** The angle between this wall and the floor must be  $\leq 90^\circ$ .

h) The lower fairing must incorporate at least a hole of 25 mm (minimum) diameter in the bottom front lower area. This hole must remain closed in dry conditions and must be opened only in wet race conditions as declared by the Clerk of the Course.

i) Front mudguard may be replaced with a cosmetic duplicate of the original parts and may be spaced upward for increased tyre clearance.

j) Rear mudguard fixed on the swing arm can be modified or changed but the original profile must be respected.

k) Motorcycles can be equipped with inner ducts to improve the air stream towards the radiator but the appearance of front, rear and the profile must not be changed.

**5.8.11 Bolts and Fasteners**

Standard bolts and fasteners may be replaced with fasteners of any material and design, but titanium bolts and fasteners cannot be used. The strength and design must be equal to or exceed the strength of the standard fastener it is replacing.

Fasteners may be drilled only for mounting a safety wire, but intentional weight-saving modifications are not allowed.

Fairing/body-work fasteners may be changed to a quick disconnect type.

Aluminium fasteners may only be used in non-structural locations.

**5.8.12 The following items may be altered or replaced from those fitted to the homologated motorcycle.**

Any type of lubrication, brake or suspension fluid may be used.

Any type of spark plug.

Any inner tube (if fitted) or inflation valves may be used.

Wheel balance weights may be discarded, changed or added to.

Gaskets and gasket materials

The instruments, the instruments support and associated cables.

Painted external surface finishes and decals.

Material for brackets connecting non original parts (fairing, etc) to the frame (or engine) cannot be made from titanium or fibre reinforced composites (with exception of exhaust bracket).

Protective covers for engine, frame, chain, footrests, ect. can be made in other material like fibre composite material if these parts do not replace original parts mounted on the homologated model.

**5.8.13 The Following Items MAY BE Removed**

Horn

Emission control items (anti-pollution) in or around the air box and engine (O<sub>2</sub> sensors, air injection devices)

Tachometer



Speedometer  
 Light switch  
 Signal (Horn) switch  
 Turn signal switch  
 Radiator fan and wiring

Chain guard as long as it is not incorporated in the rear fender. If the original chainguard is removed, a device, taking over this function in order to secure the marshals while they are removing the motorcycle, must be mounted

Bolt on accessories on a rear sub frame  
 The isolating mat between the engine and the fuel tank

#### **5.8.14 The Following Items MUST BE Removed**

Headlamp, rear lamp and turn signal indicators (when not incorporated in the fairing)  
 Openings must be covered by suitable materials  
 Rear-view mirrors  
 License plate bracket  
 Toolkit  
 Helmet hooks and luggage carrier hooks  
 Passenger foot rests  
 Passenger grabs rails  
 Safety bars, centre and side stands must be removed (fixed brackets must remain)

#### **5.8.15 The Following Items MUST BE Altered**

Motorcycles must be equipped with a functional ignition kill switch or button mounted on a side of the handlebar (within reach of the hand while on the hand grips) that is capable of stopping a running engine.  
 Throttle controls must be self-closing when not held by the hand.  
 All drain plugs must be wired. External oil filter(s) screws and bolts that enter an oil cavity must be safety wired (i.e. on crankcases, oil lines, oil coolers, etc.)  
 All motorcycles must have a closed breather system. The oil breather line must be connected and discharge in the air box.  
 Where breather or overflow pipes are fitted they must discharge via existing outlets.  
 The original closed system must be retained; no direct atmospheric emission is permitted.

### **AARR 6 - SUPERBIKE**

Look at the code F.I.M. Road Racing World Championship Superbike & Supersport Regulations and its annexations **except the following:**

Motorcycles, which are not homologated by the FIM, are eligible if they are at least homologated by one of the Alpe Adria member FMN's.

#### FIM 2.4.4 Minimum Weight

The minimum weight will be: 165 kg.

#### FIM 2.4.7 Tires

See Art AARR 0.3 (page 2)  
 and the number of tires are free

#### FIM 2.4.10 Main frame and pre assembled spare frame

During the event, each rider can bring a **second complete** motorcycle to the technical Control.

#### FIM 2.4.10.5 Wheels

Only wheels made from aluminium alloy are allowed.

Wheel diameter and rim width must remain as originally homologated. It can also be used rim with dimensions 3.5 x 16.5" (17") or 3.75 x 16.5"(17") for the front wheel and 6.25 (6)x 16,5"(17") for the rear wheel.

## **Technical Meeting of Alpe Adria Road Racing Commission Guntramsdorf, 08<sup>th</sup> December 2014**

### **Janez Pintar**

AAMU President Road Racing Commission


Martin Hejduk  
 AA RRC

Jacek Molik  
 AA RRC

Almos Györfly  
 MAMS

Walter Glueck  
 OeAMTC

## APPENDIX A

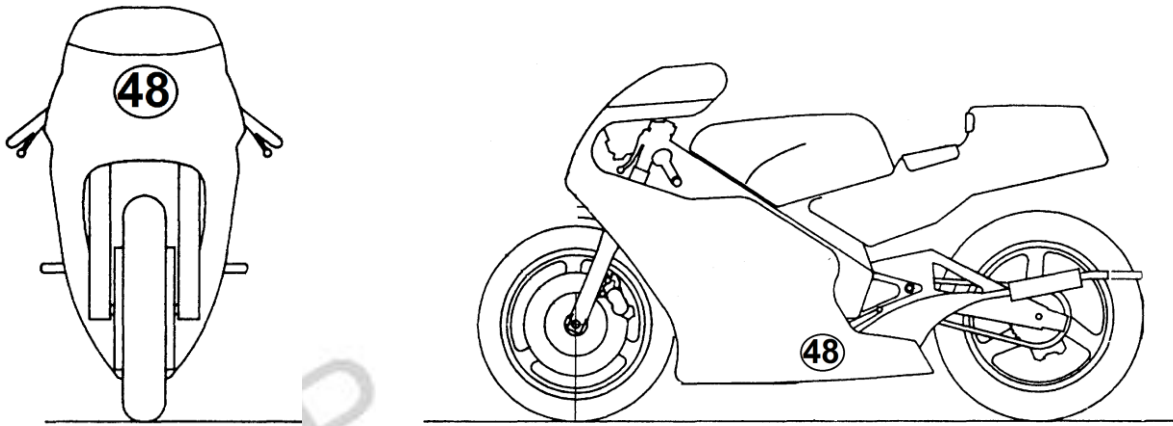

The sizes for all the front numbers are:	Minimum height Minimum width Minimum stroke Minimum space between numbers	140 mm 80 mm 25 mm 10 mm
The sizes for all the side numbers are:	Minimum height Minimum width Minimum stroke Minimum space between numbers	120 mm 80 mm 25 mm 10 mm

## APPENDIX B – rel.1

LIST OF HOMOLOGATED CDI AND WIRE HARNESS MODELS (PROVISIONAL) **will come in time**

APPENDIX C MINIMUM WEIGHTS **will come in time!**

MOTORCYCLE UNION